

# Installation Instruction of Shower Enclosure-- SE-CA030-122

To make sure the product be used properly and safely, avoid the damage of your property , avoid the damage of user and the installer ,please read the install specification and understand it carefully .


## Part A--PREPERATION

check if all accessories are there. Check if the glass were damaged. If there is any problem or quantity not sufficient!!



## Part B--Product Structure Details

- 1) Top rail (1)
- 2) Sliding Roller (4)
- 3) Stainless steel frame (2)
- 4) Stopper device (1)
- 5) Double-U channel under glass bottom (1)
- 4) Handle (2)
- 5) Sliding glass (2)
- 7) Crystal PVC Anti impact device (4)
- 8) water proof PVC strips (2)
- 9) Sus304 decoration cover (2)



The real goods photo




## Part C--INSTALLATION STEPS

### 1.install SUS304 frame From Step 1 to Step 4



Step 1.Put the double-U channel on the ground.

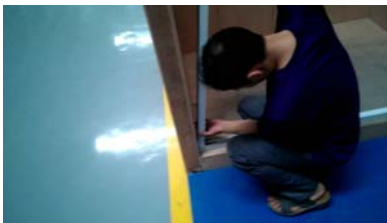

Step 2.Put the left frame on the left side ,make sure the bottom side is mounted in the U-channel



Step 3.Same as step 2 ,Put the right-side frame.



Step 4.Fix all the frames by screws.



## 2.install top sliding rail



Put the top rail between two-side frame make sure it is in the right place and make sure it is horizontal

## 3.install first two roller and the first sliding glass: From Step 1 to Step 3



step 1:put two roller hung on the top saliding rail



step 2:put the first glass at right place,make sure the bottom is mounted in the U-channel.



step 3 : install the glass in the roller and fix it

## 4.install the second two rollers and the second glass



As last step ,install the the second two rollers and the second glass

## 5.install the Crystal PVC Anti impact device



Install the 4 the anti-strike piece in the frames,fix it with screws

## 6.install the two handles



step1:divide the handle from the screw



step2:put them in right place



step 3 :fixed



step 4:install the second one



step 5: adjust it and fix

## 7.fix the top rail with the 2pcs sus304 decoration cover



put the decoration cover in the connetion of the frame and top rail,fix it with screws

## 8.install the waterproof strips and magnetic strips



Fix the roller by screw down the screw.

## Part D—MAINTENANCE TIPS

- 1) Do not push it too hard when opening and closing the door ,In case of damage the accessories.
- 2) Check the pulley and other part regularly, if there is any looseness of screw or wear ,please fix it or change .
- 3) Clean the rail regularly ,and paint little oil in the surface against to the pulley. It is good for the flexibility of the door and also can increase of service life.
- 4) Do not use acid , alkali or scratch by knife when clean ,in case of damage the printing design. use neutral detergent can easily clean the glass and steel part. please do not use brightener,

NOTICE: colorful silk-screen can not be washed by any detergent, please use water.(the detergent may cause the damage of the colorful silk-screen). Besides, the glass may be damaged in the circumstance with large temperature difference. As : hot and cold water used interchangeably or to close to the bath heater.

# Installation Instruction of Shower Enclosure SE-CJ371-121

To make sure the product be used properly and safely, avoid the damage of your property , avoid the damage of user and the installer ,please read the install specification and understand it carefully .


## Part A--PREPERATION

check if all accessories are there. Check if the glass were damaged. If there is any problem or quantity not sufficient!!



## Part B--Product Structure Details

- 1) Sus304 door glass hinge (2)
- 2) Sus304 fix glass clip (2)
- 3) Diagonal sus304 bar (1)
- 4) Ground clip (1)
- 5) L shape Handle (1)
- 6) Aluminum alloy bottom water proof channel (under door glass)
- 7) Fix glass (1)
- 8) Door glass (1)
- 9) PVC trips (between glass to the wall) (2)
- 10) PVC water guiding gutter (under door glass) (1)
- 11) PVC water strips (on hinged door glass edge close to the wall p
- 12) Magnetic PVC strip (between two glasses) (2)

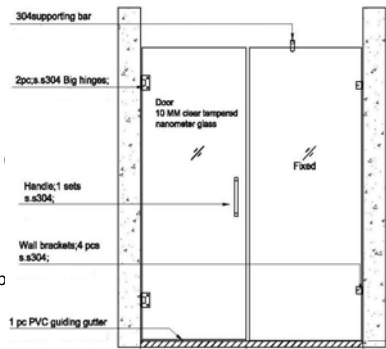

re real goods photo



## Part C--INSTALLATION STEPS

### 1.Install the accessories on fixed glass panel From Step 1 to Step 4



Step 1: Get out the fix glass pannel and sus304 clips for fix glass



Step 2: Install the 2pcs sus304 clips on fix glass



Step 3: Install the PVC trips on the fix glass edge which close to the wall-side



Step 4: Install the Diagonal sus304 bar on fix glass

**2.install the fix glass to the wall: From Step 1 to Step 4**



Step 1: Put the fix glass close to the wall

Step 2: Measure the distance from bottom to top make sure glass is upright.




Step 3: Fix the wall and ground clips with screw, install the diagonal sus304 bar with screws.

Step 4: install the Magnetic PVC strip on glass edge

**3.Install the accessories on hinged door glass pannel From Step 1 to Step 2**




Step 1: Install 2pcs sus304 hinge on door glass

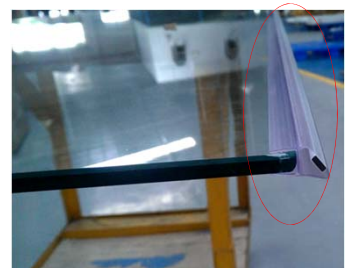

Step 2: install the Magnetic PVC strip on glass edge


#### 4.install the hinged glass panel From Step 1 to Step 5

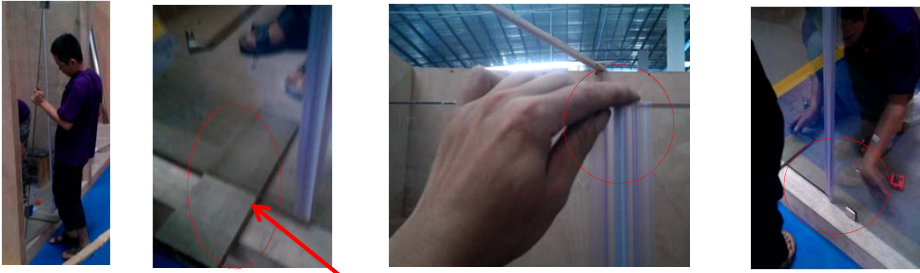

Step 1: Put the hinged glass to the wall, use wood block put on the hinged glass bottom make sure door glass and hinged glass are in horizontal line, when you see from the top or bottom



Step 2: Measure the distance from right to the left side, make sure these two pieces glass are inHorizontal straight line, before fix glass by screw

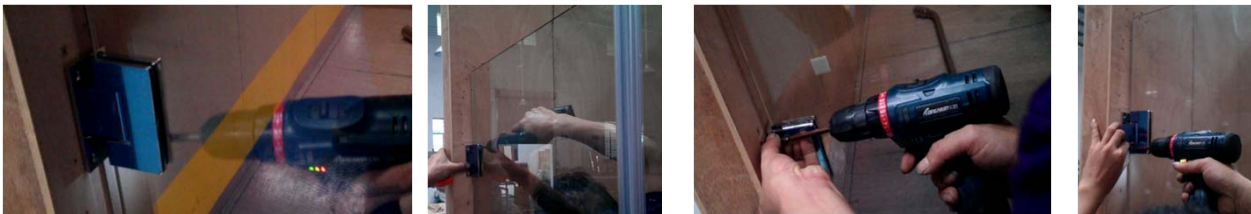

Step 3: Install 2pcs sus304 door hinges by screw, remember: Firstly, fix hinge with screw from inside, after making sure glass is vertical, then fix hinge with screw from out side.

If not vertical, glass is easy break under gravity



Step 4: Install Aluminum alloy bottom water proof channel under hinged door glass



Step 5: Install PVC water guiding gutter under hinged door glass

## 5.install "L" shape Door handle



Firstly, install inside handle, then install out side handle, connect them together with L shape design

## 6.install the waterproof strips and magnetic strips



Install PVC water strips on hinged door glass edge close to the wall part



## 7. Cover small gaps by glass cement ( Glass Glue ) avoid leaking problems, then test sample



### Part D--MAINTENANCE TIPS

- 1) Do not push it too hard when opening and closing the door ,In case of damage the accessories.
- 2) Check the pulley and other part regularly, if there is any looseness of screw or wear ,please fix it or change .
- 3) Clean the rail regularly ,and paint little oil in the surface against to the pulley. It is good for the flexibility of the door and also can increase of service life.
- 4) Do not use acid , alkali or scratch by knife when clean ,in case of damage the printing design. use neutral detergent can easily clean the glass and steel part. please do not use brightener,

NOTICE: colorful silk-screen can not be washed by any detergent, please use water.(the detergent may cause the damage of the colorful silk-screen). Besides, the glass may be damaged in the circumstance with large temperature difference. As : hot and cold water used interchangeably or to close to the bath heater.



## Installation Instruction of Shower Enclosure SE-ST221-121

To make sure the product be used properly and safely, avoid the damage of your property , avoid the damage of user and the installer ,please read the install specification and understand it carefully .


### Part A--PREPERATION

check if all accessories are there. Check if the glass were damaged. If there is any problem or quantity not sufficient!!



### Part B--Product Structure Details

- 1) top rail (1)
- 2) Stainless steel channel (1)
- 3) Tackle-block (2)
- 4) Handle (1)
- 5) Fixed glass (1)
- 6) Adjustable glass (1)
- 7) Magnet catche (2)
- 8) Stainless steel water retaining profile.(1)
- 9) Stop piece (1)
- 10) Stainless steel magnet profile(1)
- 11) Waterproof strip (1)



The real goods photo



### Part C--INSTALLATION STEPS

#### 1.install fixed glass From Step 1 to Step 5



- 1,Install stainless steel channel to the wall
- 2,make sure it's vertical to the ground
- 3,use screw to fix the stainless steel channel



- 5,put the fixed glass into the channel and fix it

**2.install top sliding rail: From Step 1 to Step 7**



Step 1: install top rail to the fixed glass



Step 2: keep it be horizontal



Step 3: mark the position of the rail on the wall



4: remove top rail from the



Step 5: open sliding rail holder, get out the screw and fix the rail holder to the 2-side of the wall on the position which we marked before.



Step 6: install the sliding track bar to the rail holder position.



Step 7: fixed the sliding rail

**3.install the stop piece**



put the stop device in the correct place and fixed it

#### 4.install the roller and door glass



Step 1: put the roller on the top rail



Step 2: hang the roller on the top rail make sure it be sliding smoothly, find the correct position of door glass screw, fix the door glass.



Step 3: Make sure the door glass can be slided well, then fix the fasten the screw on the roller.

#### 5.install the sus304 wall-frame on the door glass side: Step 1 to Step 2




Step 1: Mark the position of SUS304 frame make sure it's 100% vertical;  
Step 2: Put the sus304 frame on the marked position and install it with screw

#### 6.install the waterproof strips and magnetic strips



install the magnet strip(both in the channel and the door) install waterproof strip

## 7.install the handle

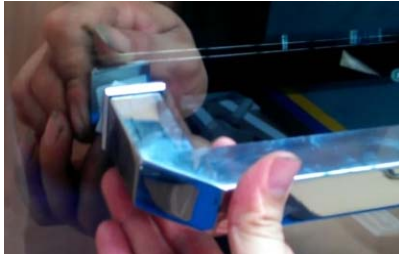

install the handle:  
1, Be sure the vertical handle on outside glass and horizontal handle on inside glass;  
2, Be sure the difference between right side door and left side door



## 8.put the glass cement



## Part D--MAINTENANCE TIPS

- 1) Do not push it too hard when opening and closing the door ,in case of damage the accessories.
- 2) Check the pulley and other part regularly, if there is any looseness of screw or wear ,please fix it or change .
- 3) Clean the rail regularly ,and paint little oil in the surface against to the pulley. It is good for the flexibility of the door and also can increase of service life.
- 4) Do not use acid , alkali or scratch by knife when clean ,in case of damage the printing design. use neutral detergent can easily clean the glass and steel part. please do not use brightener,

NOTICE: colorful silk-screen can not be washed by any detergent, please use water.(the detergent may cause the damage of the colorful silk-screen). Besides, the glass may be damaged in the circumstance with large temperature difference. As : hot and cold water used interchangeably or to close to the bath heater.

**For more details about the spcial offer,please contact us freely**

713.869.0800 Office

713.446.4696 Mobile

713.583.1777 Fax

[www.granitivicentia.com](http://www.granitivicentia.com)

1075 West Sam Houston Pkwy North Suite 214 Houston, Texas 77043